



uPVC Window & Door Systems



 **SKYPEN**
uPVC Window & Door Systems

OPAL 60



TECHNICAL DESCRIPTION

1. Profile Width: 60 mm
2. Wall Thickness: 2.5mm
3. Chambers: 3 Chambers
4. Glazing Thickness: 5, 12, 20, 24mm glass
5. Mosquito Screen: Yes
6. Recipe: Special for Tropical Regions with High UV and sunlight




AVAILABLE COLORS




Turkish Black




Dark Oak




601.1 Frame 60mm Opal




601.5 Small Openable Frame




602.1 Inward Window Sash

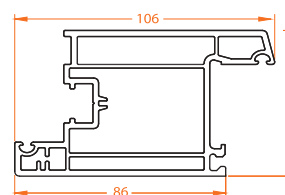


602.2 Inward Door Sash

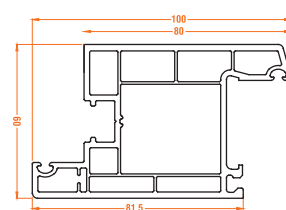


602.4 Inward Door Sash




603.1 Outward Window Sash

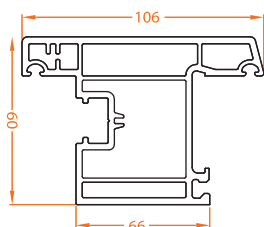


603.2 Outward Door Sash




604.1 Mullion 60mm Opal

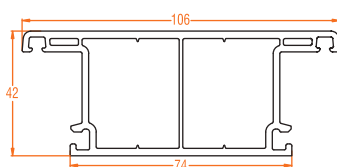


604.4 Flush Door Mullion

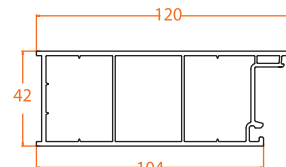


602.5 Flush Door Sash




8804.1 Flush Door Mullion




605.1 Beading 5mm




605.3 Beading 12mm




605.4 Beading 16mm




605.5 Beading 20mm




605.11 Openable Beading




606.1 Openable Screen Sash



609.1 Door Panelling



609.2 Bay Post Adaptor



609.8 Door Panelling

ROYAL 60



TECHNICAL DESCRIPTION

1. Profile Width: 60 mm
2. Wall Thickness: 2.5-3.0mm
3. Chambers: 5 Chambers
4. Glazing Thickness: 5, 12, 20, 24 32mm glass
5. Mosquito Screen: Yes
6. Recipe: Special for Tropical Regions with High UV and sunlight




AVAILABLE COLORS




Turkish Black




Dark Oak

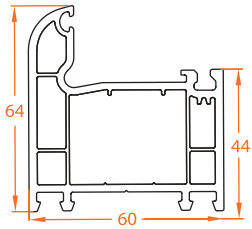


601.2 Frame 60mm Royal

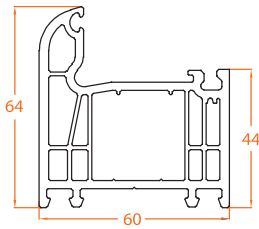


601.3 Frame 5 Chamber Royal

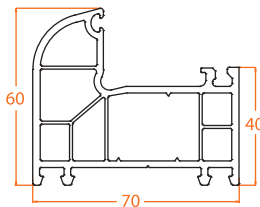


601.4 70/60 Frame

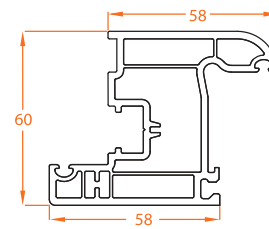


602.3 Inward Window Sash

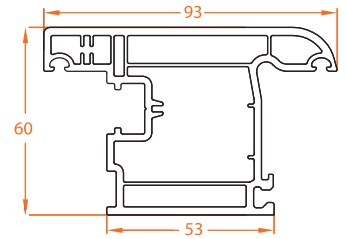


603.3 Outward Window Sash 3 Chamber

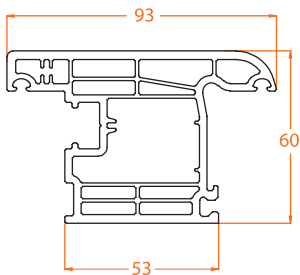


603.5 Outward Window Sash 5 Chamber

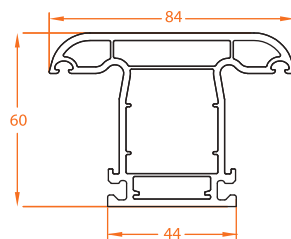


604.3 Mullion 60mm Royal

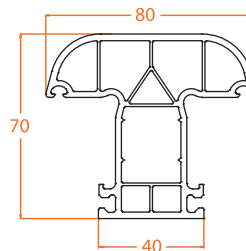


604.5 70/60 Mullion




605.12 Beading 5mm Royal




605.6 Openable Beading 24mm



609.3 60 Frame Connector



609.4 60-60 Curved Corner

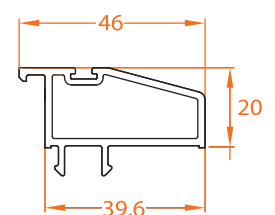

609.5 Door Closing Frame

CRYSTAL 80



TECHNICAL DESCRIPTION

1. Profile Width: 80 mm
2. Wall Thickness: 2.2-2.5mm
3. Glazing Thickness: 05, 08, 12, 18mm glass
- 4 Mosquito Screen: Yes
5. Recipe: Special for Tropical Regions with High UV and sunlight




AVAILABLE COLORS




Turkish Black




Dark Oak

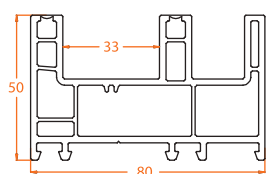


801.1 Sliding Frame 80mm

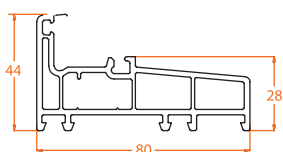


801.2 Sliding Fixed Frame

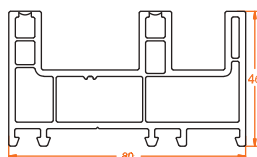


801.3 Sliding Frame 80mm




802.1 55mm Window Sash




802.2 66mm Window Sash




802.3 90mm Door Sash




802.4 60mm Window Sash




804.1 Sash Mullion




804.2 Frame Mullion




804.3 Screen Sash Mullion




805.1 Beading 5mm Round




805.3 Beading 12mm




805.4 Beading 16mm




805.12 Beading 5mm choras




806.1 Screen Sash 45mm




806.2 66mm Screen Sash




806.3 Netting Sash




809.1 Small Interlock




809.2 80-BayPost Adapter




809.3 80 Frame Connector




809.4 80-Curved Corner




809.5 Inline Adapter



809.6 80 Frame Connector



809.7 90mm Inter Lock



809.8 InterLock 88 to 80mm

DIAMOND 88




TECHNICAL DESCRIPTION

1. Profile Width: 88 mm
2. Wall Thickness: 2.5-3.0mm
3. Glazing Thickness: 5, 08, 12, 18mm glass
4. Mosquito Screen: Yes
5. Recipe: Special for Tropical Regions with High UV and sunlight




AVAILABLE COLORS




Turkish Black




Dark Oak

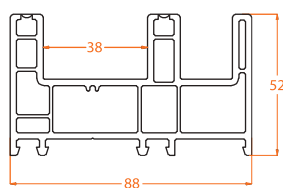


8801.1 Sliding Frame 88mm

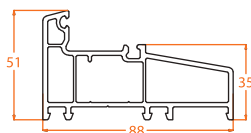


8801.3 Fixed Frame




8802.1 57mm Sash




8802.2 68mm Window Sash

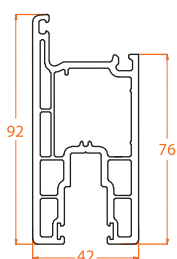


8802.3 92mm Door Sash




8804.1 Sash Mullion

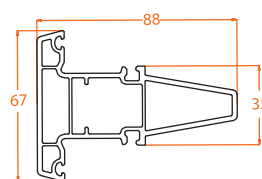


8804.2 Fixed Frame Mullion




8805.1 5mm Glass Beading



8805.4 20mm Glass Beading



8806.1 57mm Screen Sash



8807.1 Interlock

PREMIUM 92



TECHNICAL DESCRIPTION

92

1. Profile Width: mm
2. Wall Thickness: 2.2-2.5mm
3. Glazing Thickness: 05, 08, 12, 18mm glass
- 4 Mosquito Screen: Yes
5. Recipe: Special for Tropical Regions with High UV and sunlight




AVAILABLE COLORS




Turkish Black




Dark Oak

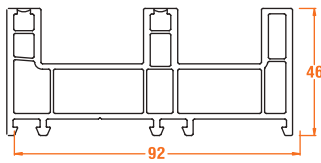


801.4 Sliding Frame 92mm

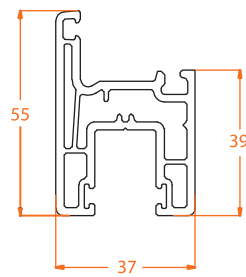


802.1 55mm Window Sash

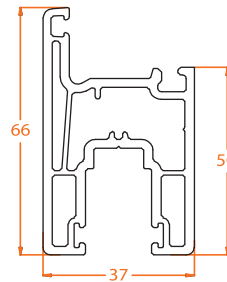


802.2 66mm Window Sash




802.3 90mm Door Sash

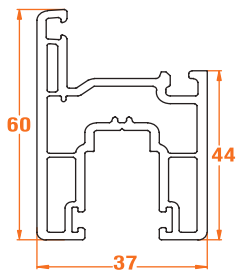


802.4 60mm Window Sash




805.1 Beading 5mm Round




805.4 Beading 16mm



805.12 Beading 5mm choras

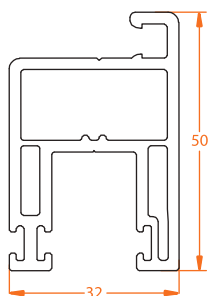

8806.2 50mm Screen Sash



809.1 Small Interlock

EXCLUSIVE 101/112




TECHNICAL DESCRIPTION

1. Profile Width: 101/112 mm
2. Wall Thickness: 2.5-3.0mm
3. Glazing Thickness: 5, 08, 12, 18mm glass
4. Mosquito Screen: Yes
5. Recipe: Special for Tropical Regions with High UV and sunlight




AVAILABLE COLORS




Turkish Black




Dark Oak

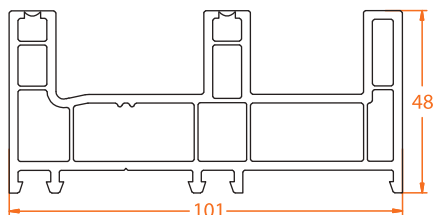


8801.4 Sliding Frame 101mm

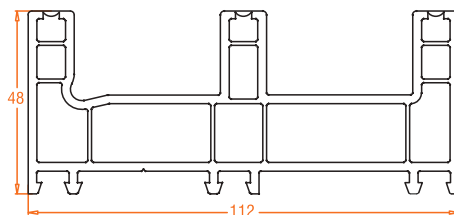


8801.5 Sliding frame 112mm

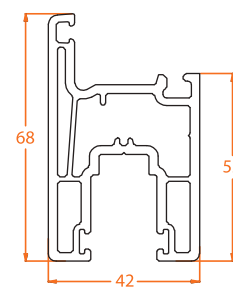


8802.2 68mm Window Sash

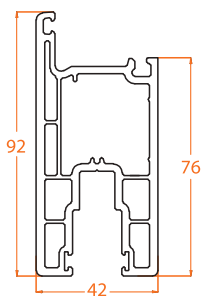


8802.3 92mm Door Sash




8805.1 5mm Glass Beading



8805.4 20mm Glass Beading




8806.2 50mm Screen Sash




8807.1 Interlock


AUXILIARY




109.1 Georgian Bar




109.2 Frame Connector

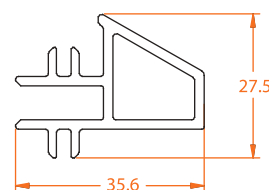


109.3 Frame Connector

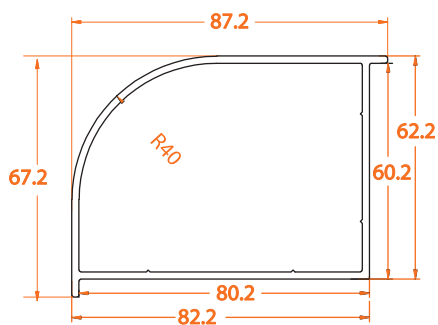


109.4 80-60 Curved Corner




109.5 Frame Connector

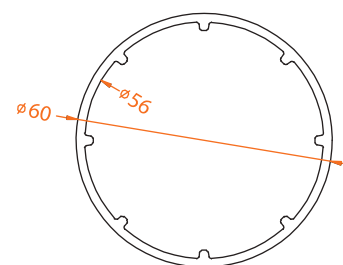


109.6 60 Circular Pipe

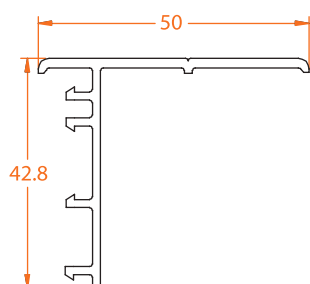


109.7 Small Border Profile

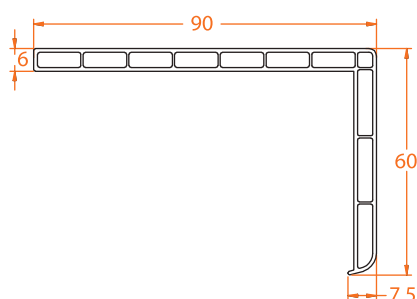

109.8 Border Profile

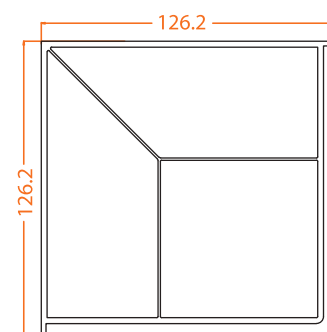

109.16 Universal Corner 126

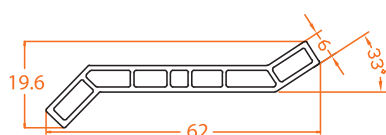

109.12 Louver



109.17 Universal Connector

BEADING SPECIFICATION

OPAL 60

GLASS	BEADING
4mm	605.1
5mm	605.1
6mm	605.1
8mm	605.1/605.12
12mm	605.3
16mm	605.4
20mm	805.1
22mm	805.1
24mm	605.6
32mm	805.4

ROYAL 60

GLASS	BEADING
4mm	605.12
5mm	605.12
6mm	605.12
8mm	605.12
12mm	605.3
16mm	605.4
20mm	805.1
22mm	805.1
24mm	605.6
32mm	805.4

BEADING SPECIFICATION

CRYSTAL 80

GLASS	BEADING
4mm	805.1/805.12
5mm	805.1/805.12
6mm	805.1/805.12
8mm	605.6
12mm	805.3
16mm	805.4

DIAMOND 88

GLASS	BEADING
4mm	8805.1
5mm	8805.1
6mm	8805.1
8mm	805.1
12mm	805.1
20mm	8805.4

Certifications

LAB TEST




WARRANTY



ISO CERTIFICATION



MES CERTIFICATION

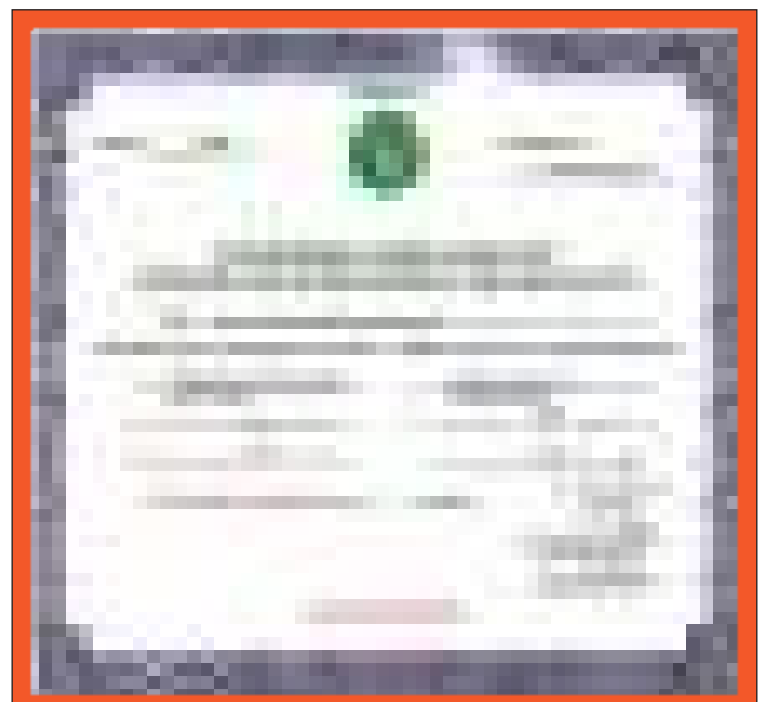

www.skypen.com.pk



Karachi

0301-6742635 / 0301-1138231 / 0309-2225548 / 0301-5744253
0301-1128257

Head office:

173-R, PECHS Block 2, Main Tariq Road, Karachi

Factory Address:

Plot N.C 362 Deh Joreji, near Gandhara Nissan,
Bin Qasim Town, Karachi, 75020

Lahore

0301-8258745
021-32589004-6

Address:

Plot # 106 A Mazoor Park Zahoor Road,
Near New Asia Factory Saggian Road,
Lahore

Islamabad

0300-0800351 / 0303-3330415
021-32589004-6

Address:

Plot 1, Industrial Triangle, Main
Kahuta Road, Sector A, Model
Town Humak, Islamabad